





LED TECHNOLOGY

4700 sqm
Illuminated area

ENGINE POWERED Line

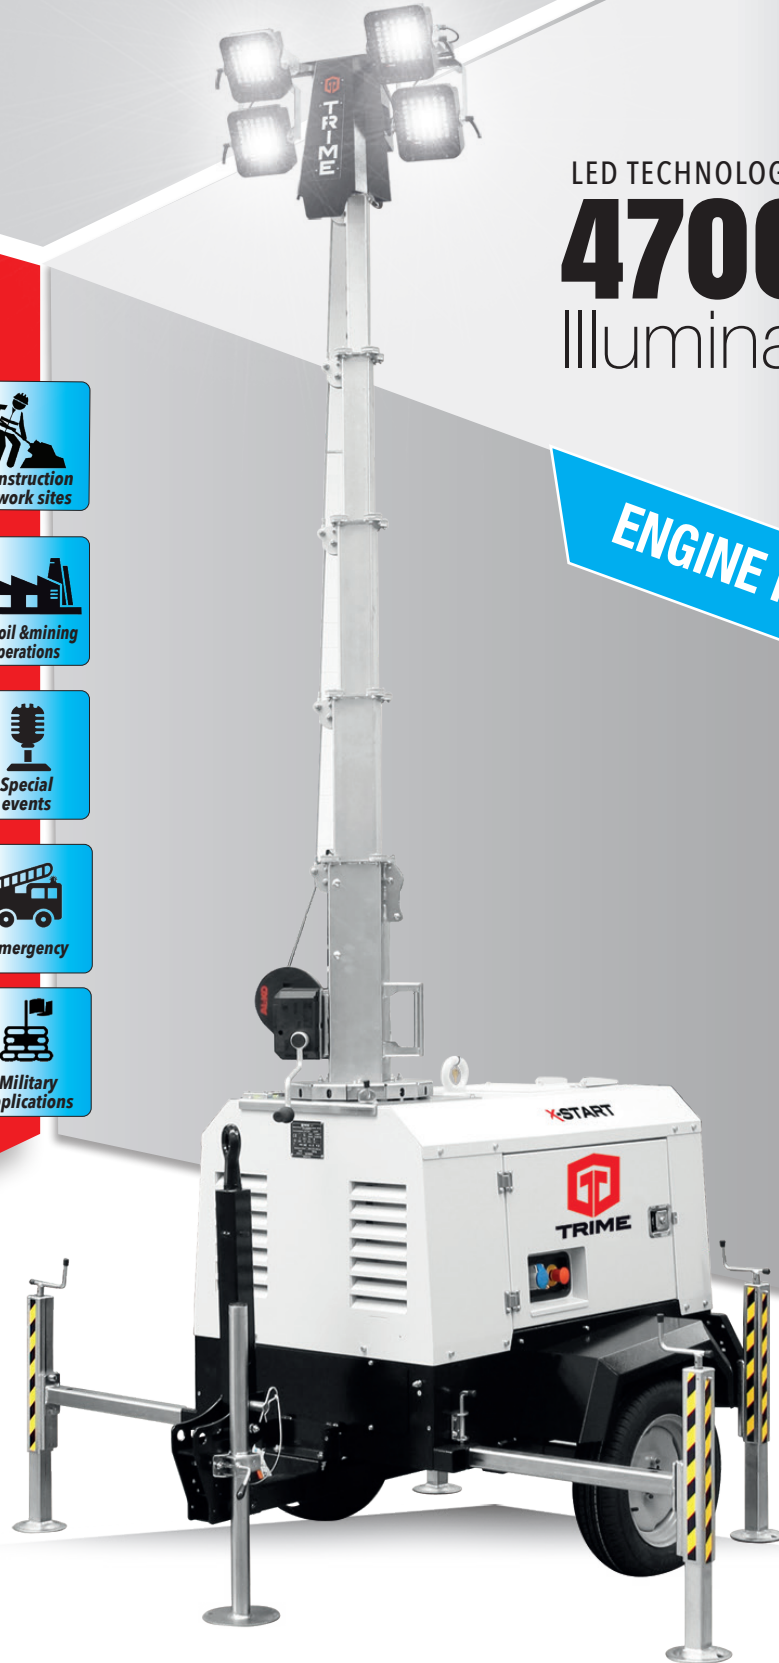

Operation: **ENGINE POWERED**
fuel tank capacity 80 litres
Kubota Z482

X-START
4X160W - LED - 8M

X-START

4X160W LED - 8M



FEATURES

- Multi-directionally adjustable and tiltable floodlights
- 7 sections vertical tower 8 m, 340° rotatable
- Galvanized metalworks
- 80 µm powder coating
- Central lifting eye, forklift pockets for effective handling
- Plug & play, colour coded cables and connectors
- Guided main coiled cable to avoid damage during tower operation
- Control panel alarms for engine protection and fuel level indicator
- Circuit breaker for electrical protection against overload
- External emergency stop button
- Certified wind stability up to 80 km/h
- 5 height adjustable stabilizers
- On board levels for guidance during stabilization

Cost Effective

RUNNING TIME
80 litres tank
145 h

NOISE
level 65 dB(A) at 7m

4700 sqm
illuminated area

18 units per truck

| Dimensions & weight | Dimensions min (mm) | | Dimensions max(mm) | | Total weight (kg) | | |
|---------------------|---------------------|------------------------|--------------------|------------------------|--------------------------|-------------------|-------------------------|
| | | 1830x1370x2560 (LxWxH) | | 2320x2570x8000 (LxWxH) | | 680 | |
| Floodlights | Type | Power (each) | Floodlights number | Illuminated area (sqm) | | | |
| | LED | 160W | 4 | 4700 | | | |
| Mast | Lifting method | Max Height | Max Wind Speed | Rotation | Options | | |
| | Manual | 8 m | 80 km/h | 340° | Homologated road trailer | | |
| Alternator | Model | Frequency (Hz) | Insulation class | Degree of protection | Single phase voltage | Auxiliary outlets | |
| | Synchronous | 50 | H | IP 23 | 3,5kVA - 230V | 1 kVA | |
| Engine | Model | Fuel | r.p.m. | Tank capacity (l) | Consumption (l/h) | Running time | Noise level dB(A) at 7m |
| | Kubota Z482* | Diesel | 1500 | 80 | 0,55 | 145 h | 65 |

* May vary based on stock availability. However, Yanmar primary equivalent brand eventually will be used

TRIME® Sales Dept. +39 0382 406 252
www.trime.it - info@trime.it
Lighting Towers